

# Model 885WP-B

## Type "B" Sealed Detector



### Conventional Initiating Devices

#### General

Notifier's Model 885WP-B is a two wire, conventional weather-proof, fixed temperature (63°C), Type "B", sealed heat detector.


This detector is sealed against the entry of moisture to a rating of IP67 and is designed to provide open area protection in environments subject to moisture.

The LED will latch on when the detector is in alarm.

The detector base may be surface mounted or fitted to a 50mm or 60mm junction box.

#### Features

- IP67 rating.
- Fitted with flying leads.
- Easy mount base.
- Fitted with tamper resistant feature.
- Base may be surface mounted or to a 50mm or 60mm junction box.

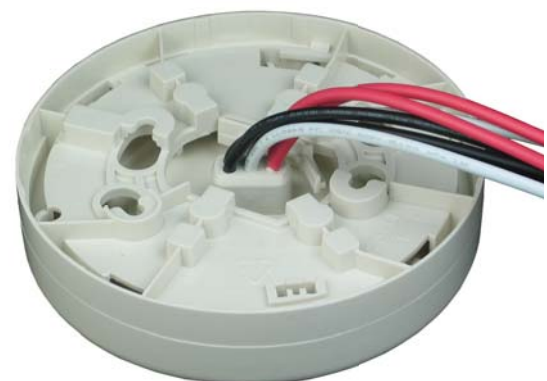

## Specifications

Operating Voltage:	8.5VDC to 30VDC
Stand-by Current:	<50µA
Alarm Current:	Min 2mA @ 3.1VDC MAx 80mA @ 6.5VDC
Latching Alarm:	Reset by momentary power interruption
Operating Temperature Range:	-15°C to 50°C
IP Rating:	IP67

## Ordering Information

10857

885WP-B Sealed Type B Thermal

---

© 2009 by Honeywell International Inc. All rights reserved.  
Unauthorised use of this document is strictly prohibited.

---

This document is not intended for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information contact your nearest Notifier Sales Office or Distributor  
[www.notifier.com.au](http://www.notifier.com.au)

---